


# *Hexa Blade*

## Grooving and Parting tool with precision 6 corners

- Grooving and Parting tool with high economical 6 corners
- Increased reliability and stability in cutting due to high qualified cutting edge

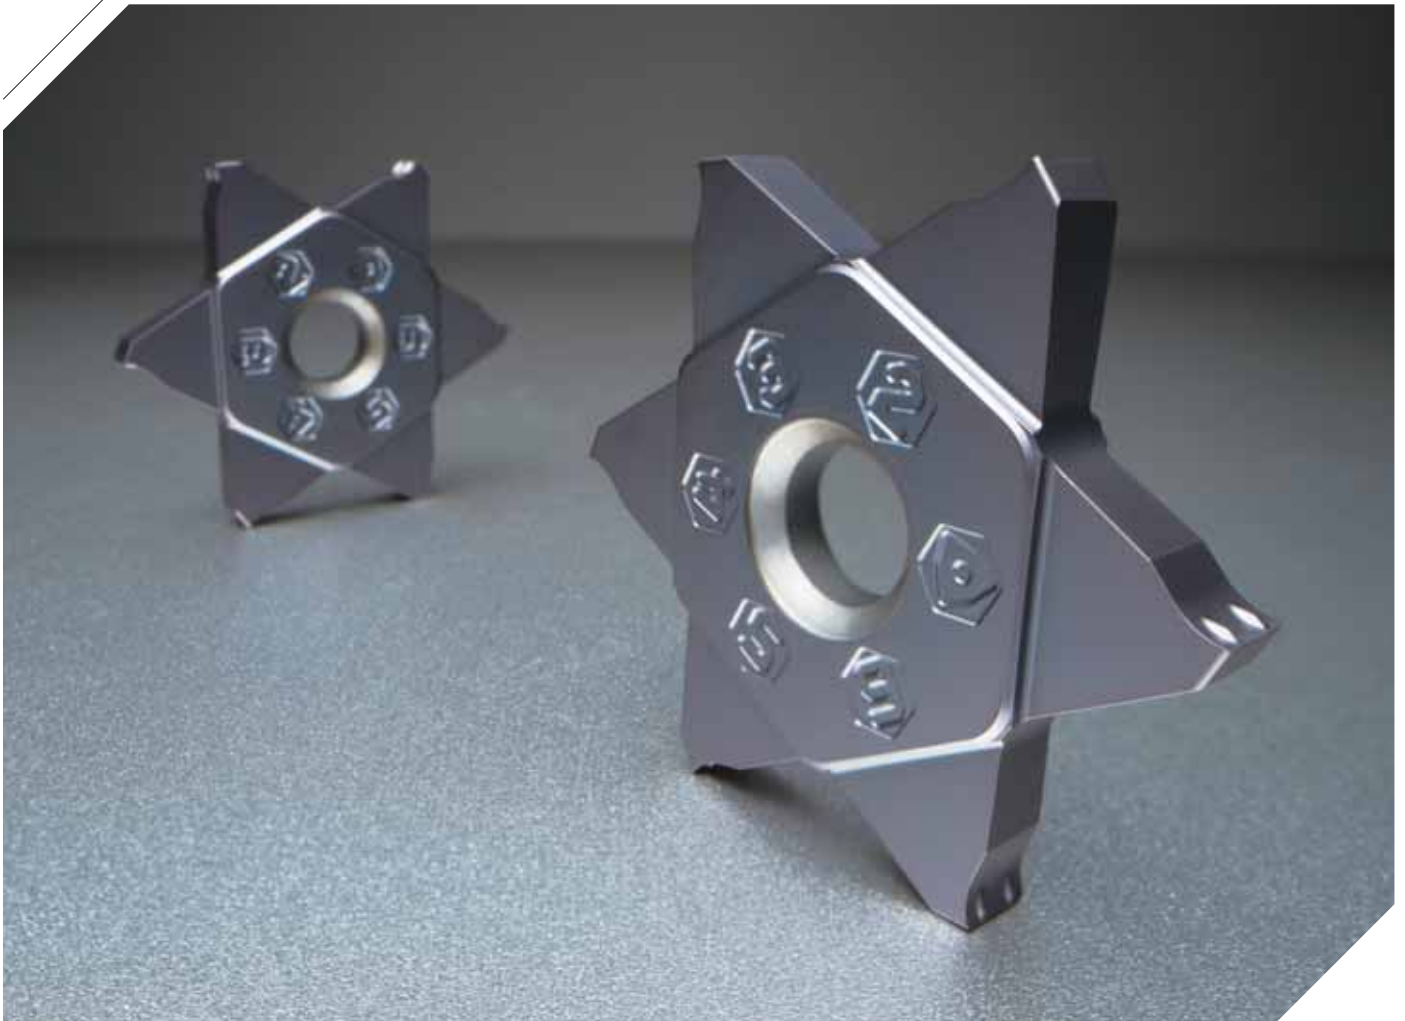

Grooving and Parting tool with precision 6 corners

# Hexa Blade

KORLOY launched Hexa Blade for precision typed Grooving and Parting realizing high cost efficiency due to 6 corners.

The exclusive structured **Hexa blade 6 corners insert** provides stable cutting quality with equal clamping dimensions even with corner changes by applying precision manufacturing technology. In addition, bumped chip breaker provides good chip control in various cutting conditions.

The **Hexa Blade holder** ensures long tool life through wide clamping side and strong clamping system with 3-sided clamping. It also provides convenient cutting from easy clamping inserts with various cutting widths on one holder.

» **High cost efficiency**

- 6 cornered insert for Grooving and Parting

» **Good chip control**


- Increased chip control by bumped chip breaker

» **Regular cutting quality**


- Excellent corner dimension deviation management from precision manufacturing technology

» **High cutting stability**

- Strong clamping system from wide clamping side and 3-sided clamping

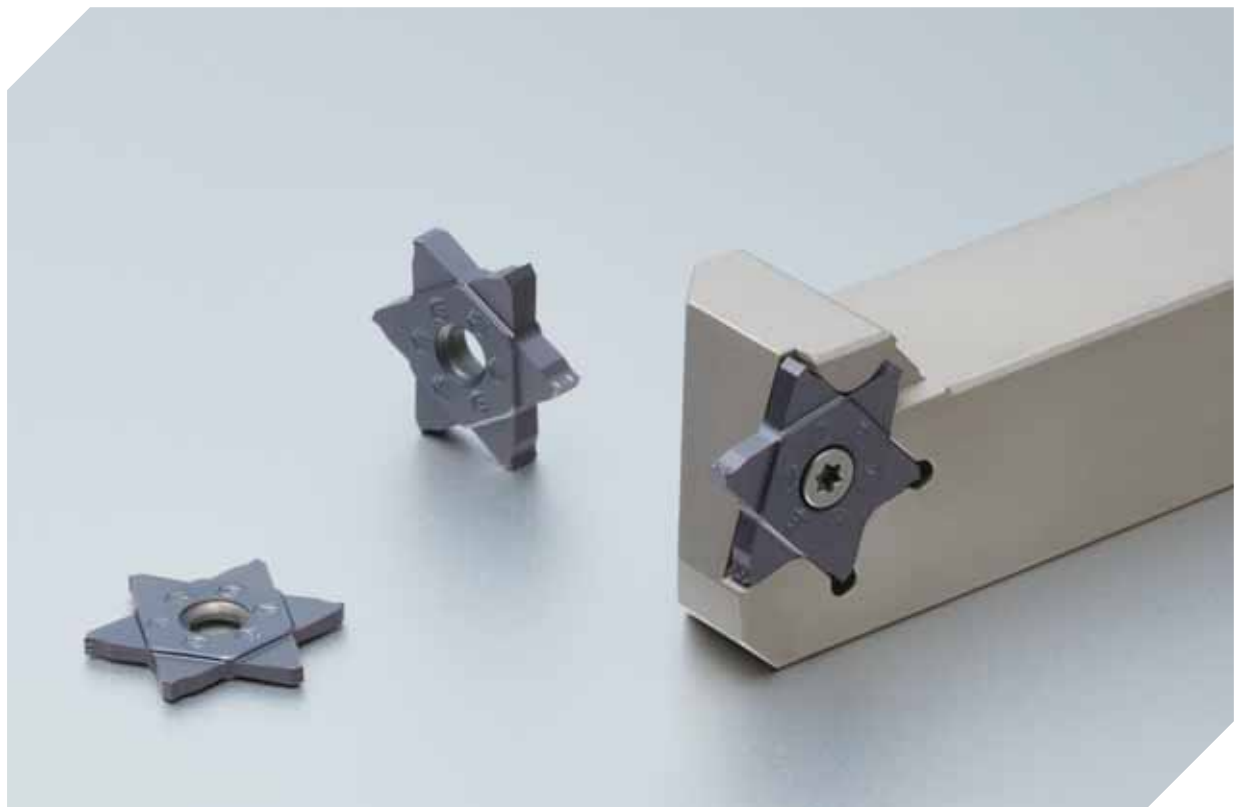


## Code system

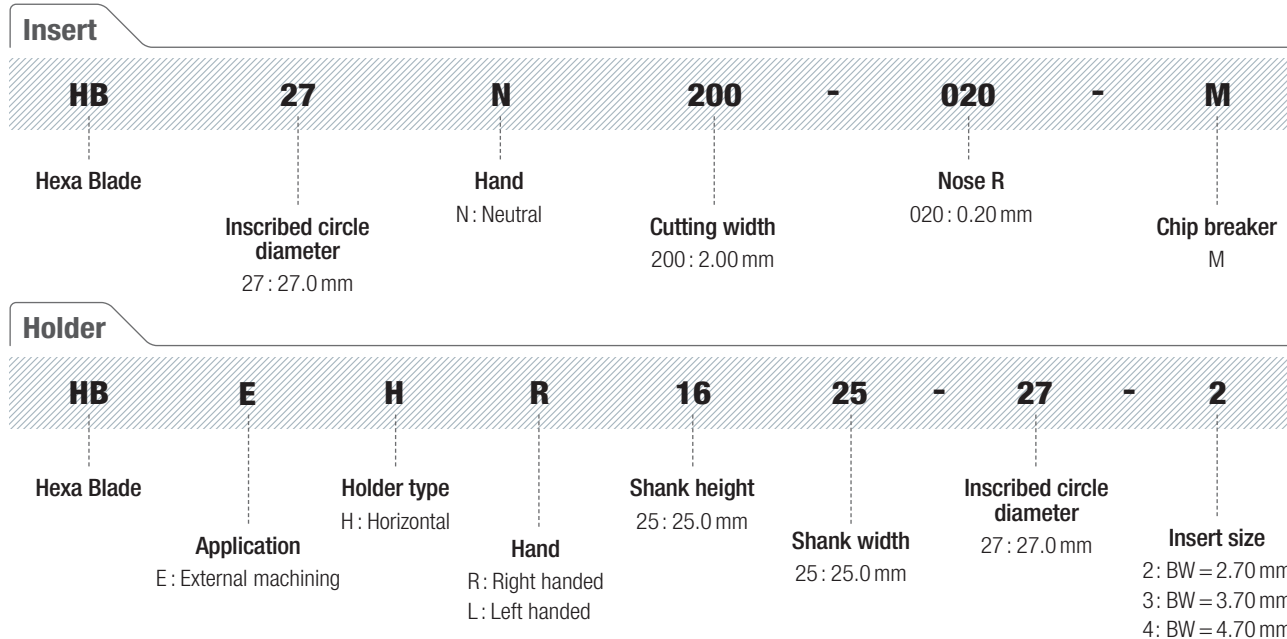

## Features

### M Chip breaker

- Dot-typed chip breaker general cutting for various workpieces
- Good chip control preventing long chip and chip curling
- Stable cutting even in high feed cutting due to strengthened cutting edge structure



- Precision insert**
- Superior quality in dimensions
  - Excellent corner dimension deviation management
  - Equally stable performance




- Strong cutting edge**
- Increased high feed cutting performance

- Neutral hand**
- Convenient use with neutral hand

- 6 cornered insert**
- High cost efficiency from multi-corners


- Wide clamping area**
- More stable clamping system
  - Strengthen anti-vibration during machining
  - Reliable tool life

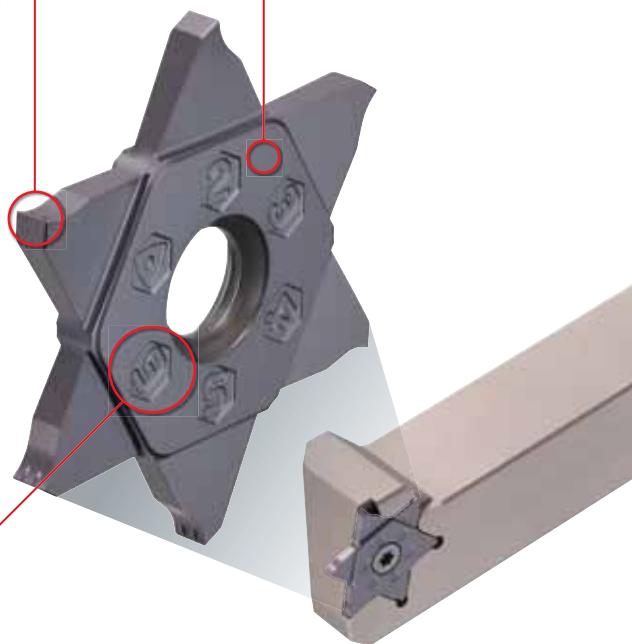

## Grade features


### PC5300

- PVD coating layer with high hardness and oxidation resistance during machining at high temperature  
Superior oxidation resistance during machining of steel, cast iron, stainless steel, and heat-resistance alloys
- Ultra fine grain substrate with high toughness and special treatment on the surface  
Improved welding resistance and chipping resistance

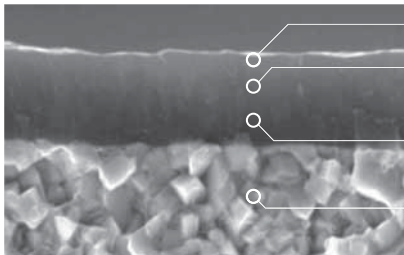


- Coating layer with high surface finish Superior welding resistance
- Coating layer with high hardness and oxidation resistance during machining at high temperature Superb wear resistance during machining at high speeds
- Coating layer with high toughness and high adhesive strength Excellent chipping resistance
- Ultra fine grain substrate with high toughness Great fracture resistance and stability in machining



- Special treatment on the surface  
(Attached pictures if surface of coating layer)

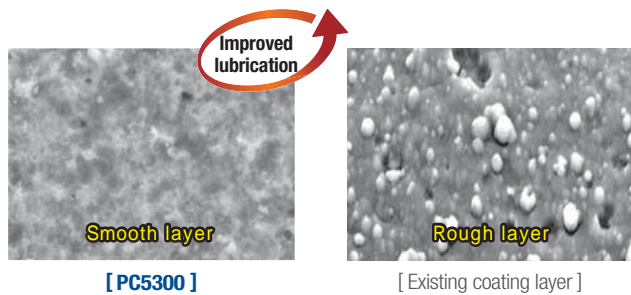

- Coating layer with oxidation resistance during machining at high temperature  
(after 900° heat treatment)

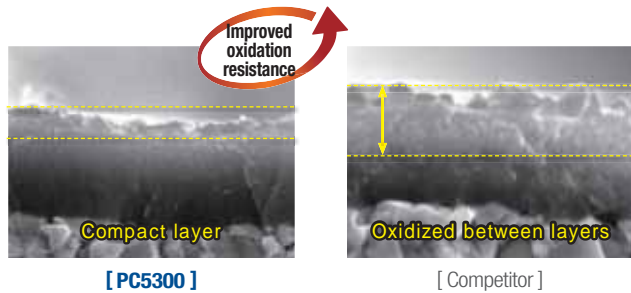

## Application range

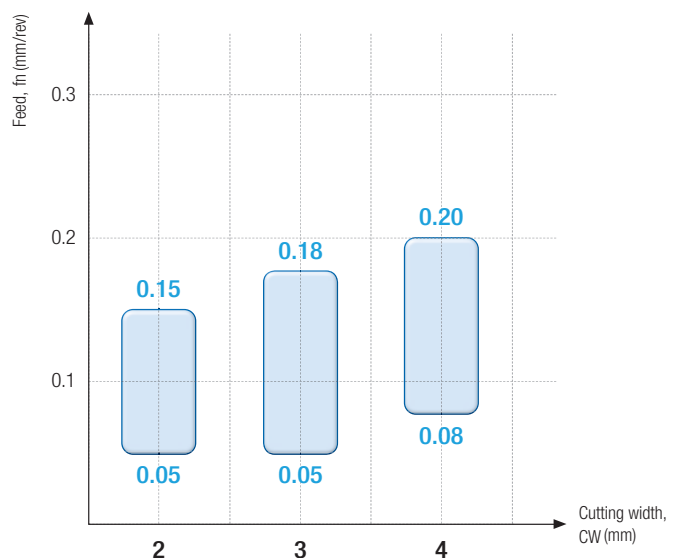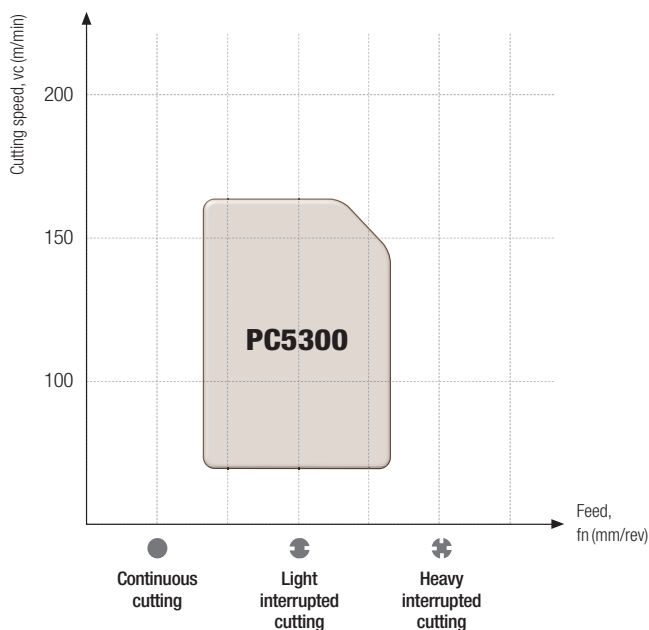

## Performance evaluation

### Wear resistance

**Workpiece** Alloy steel (43CrMo4)

**Cutting conditions**  $vc(m/min) = 100$ ,  $fn(mm/rev) = 0.1$ ,  $ap(mm) = 2.5$ , wet


**Tools** **Insert** HB27N200-020-M(PC5300) **Holder** HBEHR2525-27-2



[ Hexa Blade ]





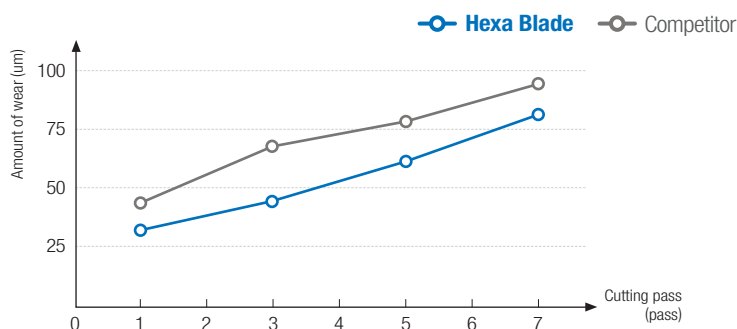


[ Competitor ]



## Cutting width and cutting depth by tools


: 1<sup>st</sup> recommendation : 2<sup>nd</sup> recommendation

Tools	Cutting width (mm)				No. of edges	Machining				Features
	2	4	6	8		External	Internal	Facing	Parting	
	5	10	20	60						
Cutting depth maximum (mm)										
Hexa Blade 	1.78	4.0			6					<ul style="list-style-type: none"> <li>Precision type</li> <li>High cost efficient cutting</li> </ul>
TB 	1.25	6.0			3					<ul style="list-style-type: none"> <li>Precision type</li> <li>Optimal for automated machining</li> </ul>
K Notch 	0.75	6.3			2					<ul style="list-style-type: none"> <li>Precision type</li> <li>Strong clamping system</li> </ul>
KGT 	1.5	8.0			2					<ul style="list-style-type: none"> <li>For various kinds of cutting</li> <li>For general cutting range</li> </ul>
Saw Man-X 	2.0	6.0		60.0	1					<ul style="list-style-type: none"> <li>Various lead angles</li> <li>Minimizing burr</li> </ul>


## Recommended cutting conditions

ISO	Workpiece			Specific cutting force (N/mm <sup>2</sup> )	Brinell hardness (HB)	Grade	C/B	ap (mm)						
	Workpiece materials		ISO			AISI	PC5300		M					
							vc (m/min)		fn (mm/rev)					
<b>P</b>	Unalloyed steel	C = 0.25~0.55%	C35	1035	1600	150	110	0.15	≤ 5.0					
							<b>130</b>	<b>0.12</b>						
							150	0.10						
		C = 0.55~0.80%	C45	1045 1046	1700	170	80	0.15						
							<b>100</b>	<b>0.12</b>						
							120	0.10						
	Low alloy steel	Non-hardened	43CrMo4	4140	1700	180	80	0.15						
							<b>100</b>	<b>0.12</b>						
							120	0.10						
		Hardened and tempered	-	4145	2050	350	50	0.15						
							<b>60</b>	<b>0.12</b>						
							70	0.10						
High alloy steel	Annealed	-	D2	1950	200	60	0.15							
						<b>75</b>	<b>0.12</b>							
						90	0.10							
						<b>M</b>	Austenite series	X5CrNi18-9	304	2000	180	60	0.10	≤ 5.0
												<b>80</b>	<b>0.08</b>	
												100	0.06	
X5CrNiMo17-12-2	316	2000	180	60	0.10									
				<b>80</b>	<b>0.08</b>									
				100	0.06									


### **P** Steel

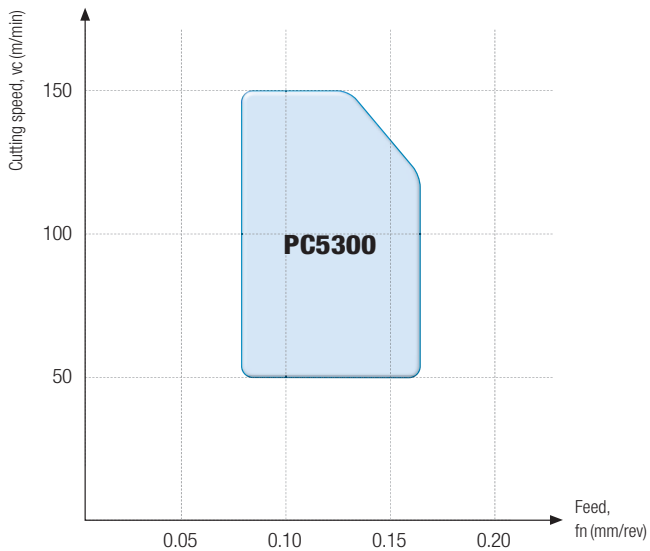

### **M** Stainless steel

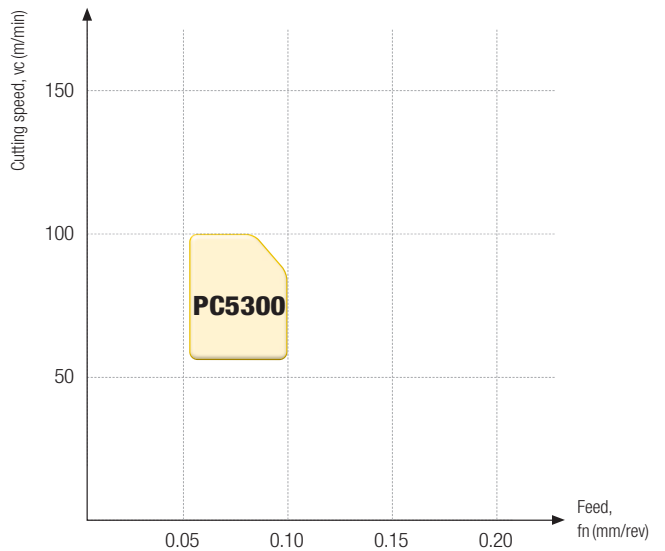

# Tool selection guide

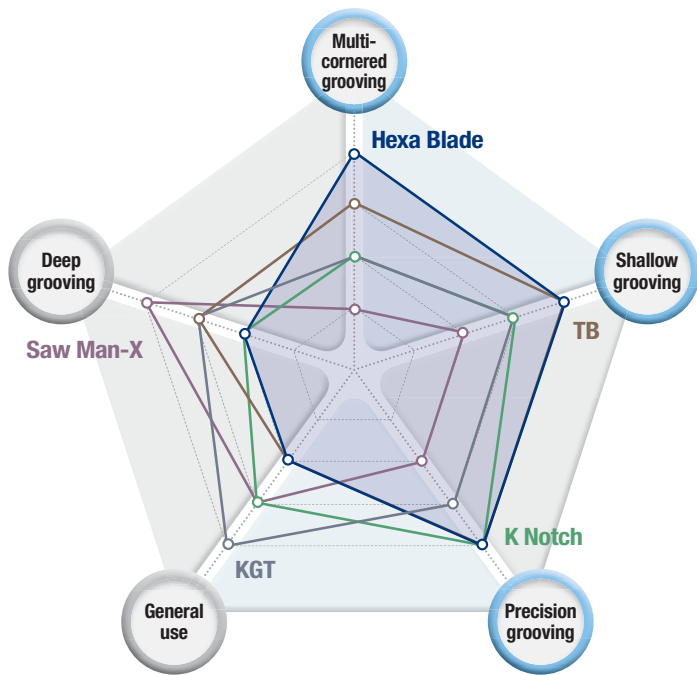

## Hexa Blade <sup>New</sup>

- Precision typed and 6 cornered insert
- High cost efficiency
- Precision grooving and multi-cornered grooving




## TB

- Precision typed and 3 cornered insert
- Optimal for automatic cutting
- Precision grooving



## K Notch

- Precision typed and 2 cornered insert
- Strong clamping system
- Precision grooving



## KGT

- 2 cornered insert
- Various applications
- For general use




## Saw Man-X <sup>New</sup>

- 1 cornered insert
- Optimal for interrupted and high feed parting
- Deep grooving





Tools	Multi-cornered grooving	Shallow grooving	Precision grooving	General use	Deep grooving
Hexa Blade <sup>New</sup>					
TB					
K Notch					
KGT					
Saw Man-X <sup>New</sup>					

## Product using guide

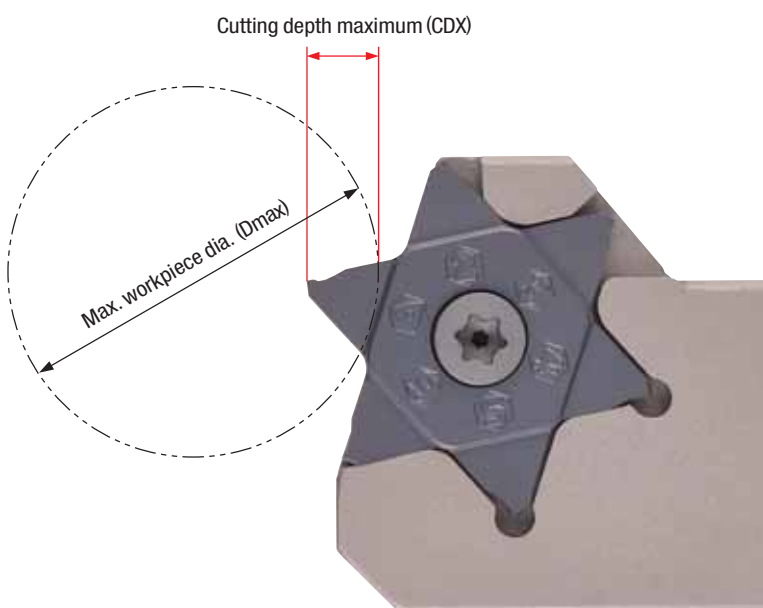Cutting depth maximum and max. workpiece dia. (mm)		
Cutting depth maximum (CDX)	Max. workpiece dia. (Dmax)	Using guide
5.0	≤ 30	 <p>① Hexa Blade enables to cut with maximum 5.0 mm depth of cut. In this case, the maximum workpiece cutting diameter is 30 mm.</p> <p>② In Hexa Blade cutting with 2.0 mm depth of cut, the size of workpiece cutting diameter doesn't matter. If cutting with more than 2.0 mm depth of cut, the applicable workpiece cutting diameter could be different depending on depth of cut.</p> <p>③ If workpiece cutting diameter is bigger than 65 mm, the maximum depth of cut is 4.3 mm. In case of cutting with deeper than 4.3 mm, there could be cutting troubles because the holder touches workpieces.</p> <p>④ If depth of cut is 3.5 mm, the maximum workpiece cutting diameter is 109 mm. If it is bigger than 109 mm, there could be cutting troubles because the holder touches workpieces.</p> <p>Cutting depth maximum and max. workpiece dia. on the chart could be different up to cutting environment.</p>
4.9	≤ 34	
4.8	≤ 38	
4.7	≤ 42	
4.6	≤ 46	
4.5	≤ 58	
4.4	≤ 62	
4.3	≤ 66	
4.2	≤ 70	
4.1	≤ 74	
4.0	≤ 89	
3.9	≤ 93	
3.8	≤ 97	
3.7	≤ 101	
3.6	≤ 105	
3.5	≤ 109	
3.4	≤ 123	
3.3	≤ 127	
3.2	≤ 131	
3.1	≤ 135	
3.0	≤ 147	
2.9	≤ 151	
2.8	≤ 155	
2.7	≤ 159	
2.6	≤ 163	
2.5	≤ 200	
2.4	≤ 200	
2.3	≤ 200	
2.2	≤ 200	
2.1	≤ 200	
2.0	∞	





Picture	Designation	Coated	Dimensions (mm)				Geometries
		PC5300	CW	RE	BW	IC	
	<b>HB</b> 27N178-018-M		1.78	0.18	2.7	27	
	27N185-015-M		1.85	0.15	2.7	27	
	27N196-015-M		1.96	0.15	2.7	27	
	27N200-020-M		2.00	0.20	2.7	27	
	27N200-040-M		2.00	0.40	2.7	27	
	27N270-010-M		2.70	0.10	3.7	27	
	27N287-020-M		2.87	0.20	3.7	27	
	27N300-000-M		3.00	0.00	3.7	27	
	27N300-020-M		3.00	0.20	3.7	27	
	27N300-040-M		3.00	0.40	3.7	27	
	27N374-020-M		3.74	0.20	4.7	27	
	27N398-020-M		3.98	0.20	4.7	27	
	27N400-040-M		4.00	0.40	4.7	27	

: Stock item

## HBEHR/L



HB

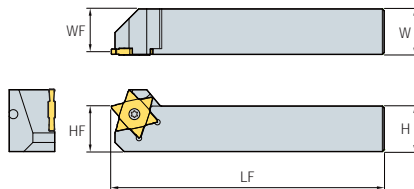


Fig. 1


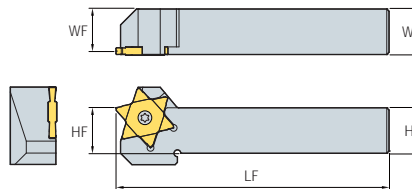


Fig. 2



\* R type holder

(mm)

Designation	Stock		CW	H	W	LF	HF	WF	Screw	Wrench	Fig.
	R	L									
<b>HBEHR/L</b> 1616-27-2			1.78 ~ 2.00	16	16	100	16	15	PTMA0512D	TW15P	2
1616-27-3			2.70 ~ 3.00	16	16	100	16	14.5			2
1616-27-4			3.74 ~ 4.00	16	16	100	16	14			2
2020-27-2			1.78 ~ 2.00	20	20	120	20	19			2
2020-27-3			2.70 ~ 3.00	20	20	120	20	18.5			2
2020-27-4			3.74 ~ 4.00	20	20	120	20	18			2
2525-27-2			1.78 ~ 2.00	25	25	150	25	24			1
2525-27-3			2.70 ~ 3.00	25	25	150	25	23.5			1
2525-27-4			3.74 ~ 4.00	25	25	150	25	23			1

: Stock item

### Cutting depth maximum and max. workpiece dia. (mm)

<b>Cutting depth maximum (CDX)</b>	5.0	4.5	4.0	3.5	3.0	2.5	2.0
<b>Max. workpiece dia. (Dmax)</b>	≤ 30	≤ 58	≤ 89	≤ 109	≤ 147	≤ 200	∞


Please refer to the page 8 for the cutting depth maximum and max. workpiece dia. (mm)

### ⚠ For the safe metalcutting

- Use safety supplies such as protective gloves to prevent possible injury while touching the edge of tools.
- Use safety glasses or safety cover to hedge possible dangers. Inappropriate usage or excessive cutting condition may lead tool's breakage or even the fragment's scattering.
- Clamp the workpiece tightly enough to prevent its movement while its machining.
- Properly manage the tool change phase because the inordinately used tool can be easily broken under the excessive cutting load or severe wear, and it may threat the operator's safety.
- Use safety cover because chips evacuated during cutting are hot and sharp and may cause burns and cuts. To remove chips safely, stop machining, put on protective gloves, and use a hook or other tools.
- Prepare for fire prevention measures as the use of the non-water soluble cutting oil may cause fire.
- Use safety cover and other safety supplies because the spare parts or the inserts can be pulled out due to centrifugal force while high speed machining.



**Head Office:** Holystar B/D, 326, Seocho-daero, Seocho-gu, Seoul, 06633, Republic of Korea  
Tel: +82-2-522-3181 Fax: +82-2-522-3184, +82-2-3474-4744 Web: [www.korloy.com](http://www.korloy.com) E-mail: [sales.khq@korloy.com](mailto:sales.khq@korloy.com)

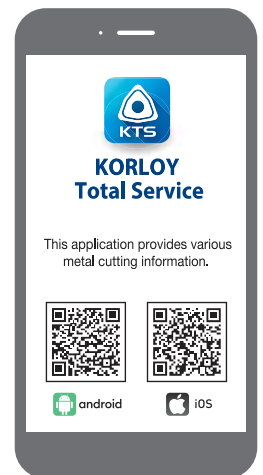

### **KORLOY AMERICA**

620 Maple Avenue, Torrance, CA 90503, USA  
Tel: +1-310-782-3800 Toll Free: +1-888-711-0001 Fax: +1-310-782-3885  
E-mail: [sales.kai@korloy.com](mailto:sales.kai@korloy.com)

### **KORLOY INDIA**

Plot No. 415, Sector 8, IMT Manesar, Gurgaon 122051, Haryana, India  
Tel: +91-124-4391790 Fax: +91-124-4050032  
E-mail: [sales.kip@korloy.com](mailto:sales.kip@korloy.com)

### **KORLOY TURKIYE**

Serifali Mahallesi, Burhan Sokak NO: 34  
Dudullu OSB/Umraniye/Istanbul, 34775, Turkey  
Tel: +90-216-415-8874 E-mail: [sales.ktl@korloy.com](mailto:sales.ktl@korloy.com)

### **KORLOY RUSSIA**

Krasivy Dom office No. 305, Bld. 5, Novovladykinskiy proezd 8, 127106,  
Moscow, Russia  
Tel: +7-495-280-1458 Fax: +7-495-280-1459 E-mail: [sales.krc@korloy.com](mailto:sales.krc@korloy.com)

### **KORLOY FACTORY INDIA**

Plot No. 415, Sector 8, IMT Manesar, Gurgaon 122051, Haryana, India  
Tel: +91-124-4391790 Fax: +91-124-4050032  
E-mail: [pro.kim@korloy.com](mailto:pro.kim@korloy.com)

### **KORLOY EUROPE**

Gablonzer Str. 25-27, 61440 Oberursel, Germany  
Tel: +49-6171-277-83-0 Fax: +49-6171-277-83-59  
E-mail: [sales.keg@korloy.com](mailto:sales.keg@korloy.com)

### **KORLOY BRASIL**

Av. Aruana 280, conj.12, WLC, Alphaville, Barueri,  
CEP06460-010, SP, Brasil  
Tel: +55-11-4193-3810 E-mail: [sales.kbl@korloy.com](mailto:sales.kbl@korloy.com)

### **KORLOY CHILE**

Av. Providencia 1650, Office 1009, 7500027  
Providencia-Santiago, Chile  
Tel: +56-229-295-490 E-mail: [sales.kcs@korloy.com](mailto:sales.kcs@korloy.com)

### **KORLOY MEXICO**

Calle R. M. Clemencia Borja Taboada 522, Jurica Acueducto,  
76230 Juriquilla, Qro., Mexico  
Tel: +52-442-673-7388 E-mail: [sales.kml@korloy.com](mailto:sales.kml@korloy.com)

