



KING Drill Mini

Indexable drill for small diameter machining (Ø9.0 to Ø11.5 mm)

- Excellent centering and chip management by applying a unique insert shape
- Maintained high rigidity through variable flutes and an optimized coolant system, achieving stable chip evacuation



LOMT-LD

KING Drill Mini

The indexable drill offers faster setup and replacement times compared to solid drills since just the inserts need to be changed making maintenance much easier. It enables excellent productivity, economy, and flexibility across a wide range of materials and machining conditions. KORLOY has launched combining these advantages in the KING Drill Mini, a small-diameter indexable drill.

The holder features variable flutes and a coolant system optimized for small-diameter machining ($\varnothing 9.0$ to $\varnothing 11.5$ mm), providing excellent rigidity and stable chip evacuation. The insert improves centering performance with its V-shaped cutting edge and achieves superior chip management through curved cutting edges. Additionally, the insert design is the same for both internal and external applications, enhancing management efficiency.

KING Drill Mini maximizes production line efficiency in small-diameter machining by optimizing cost, time, and flexibility, making it an ideal drilling solution.

» **Maximize production efficiency**

- Quick tool changes and minimized equipment setup time

» **Excellent holder rigidity and stable chip evacuation**

- Applied optimized variable flutes and coolant system

» **Excellent centering and chip management**

- Applies a V-shaped cutting edge and a curved cutting edge

» **Improved management efficiency**

- Uses the same insert for both internal and external cutting



Code System

Holder						
K	3D	090	20		-	03
KING, KORLOY	Depth of cut 2D, 3D	Drill Diameter 090: Ø9.0mm	Shank Diameter Ø20mm	Shank Type None: Flange Shank, Weldon HP: Flange Shank, Weldon, PT Tap		Applied insert inscribed circle 03: LOMT03

Insert Features

- Curved cutting edge and L-type design for improved chip management
- V-shaped cutting edge applied to enhance centering

Application of a V-shaped cutting edge

- Improves centering


Application of L-type

- Enhances chip management



Application of a curved cutting edge

- Improves chip management by inducing chip curvature

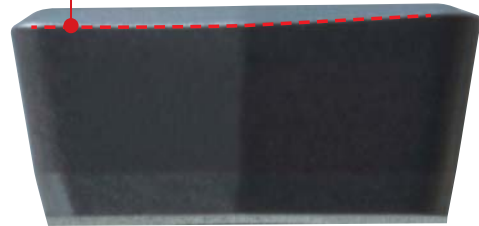

Holder Features


- Applied variable flutes and an optimized coolant system to enhance chip evacuation
- Uses the same insert for both internal and external cutting to simplify inventory management

Application of variable flutes

- optimized flute design to enhance holder rigidity and improve chip evacuation

Application of an optimized coolant system


- Design tailored for small diameters to improve chip evacuation

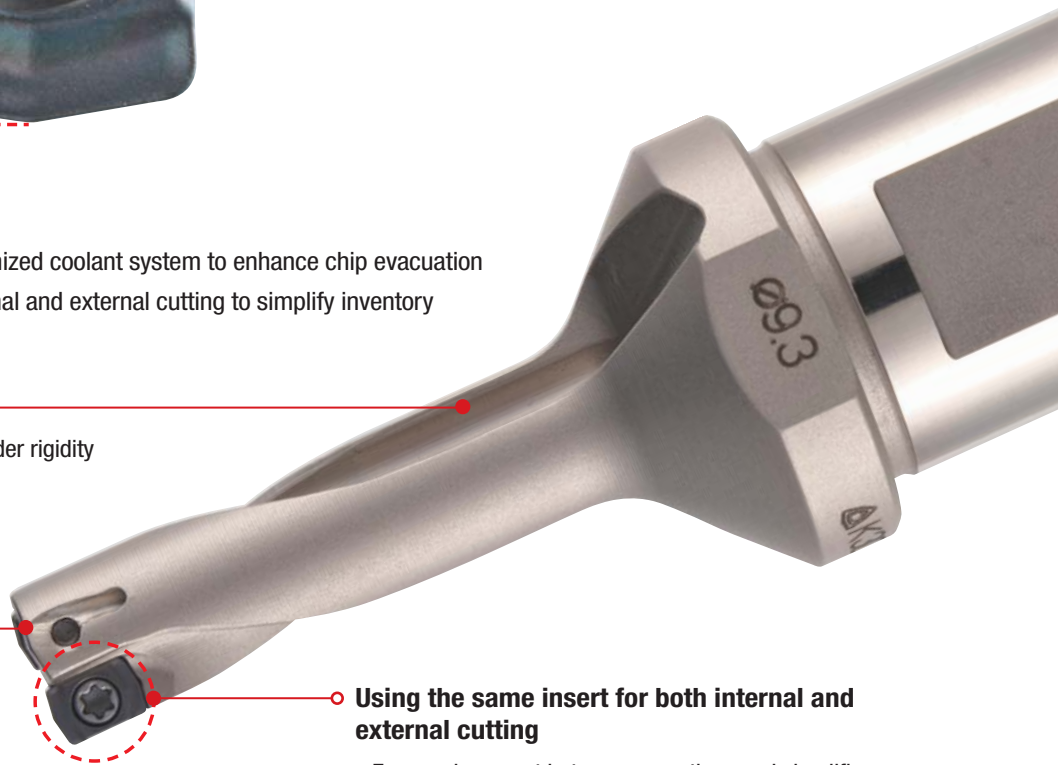

Using the same insert for both internal and external cutting

- Easy replacement between operations and simplifies inventory management

Tool Selection Guide

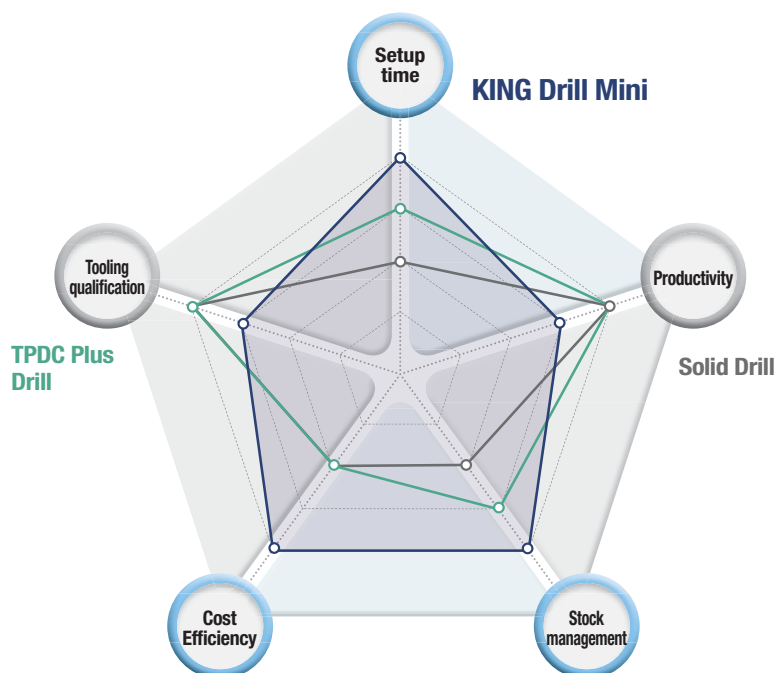


KING Drill Mini ^{New}

- Quick tool changes
- Efficient stock management
- Reduced operating costs



Solid Drill

- Excellent productivity
- Suitable for high-precision machining



TPDC Plus Drill

- Excellent productivity
- Suitable for high-precision machining




Tool	Setup time	Productivity	Stock management	Cost Efficiency	Tooling qualification
KING Drill Mini ^{New}	★★★★★	★★★★	★★★★★	★★★★★	★★★★
Solid Drill	★★	★★★★★	★★	★★	★★★★★
TPDC Plus Drill	★★★	★★★★★	★★★	★★	★★★★★

Cost of tool demand




Items	Workpiece	vc (m/min)	fn (mm/rev)	ap (mm)	DC (mm)
KING Drill Mini (K3D10020-03)	SCM440 [HB200]	160	0.08	30(3D)	Ø10
Solid Drill		80	0.2	30(3D)	Ø10

[Tool changeover time]

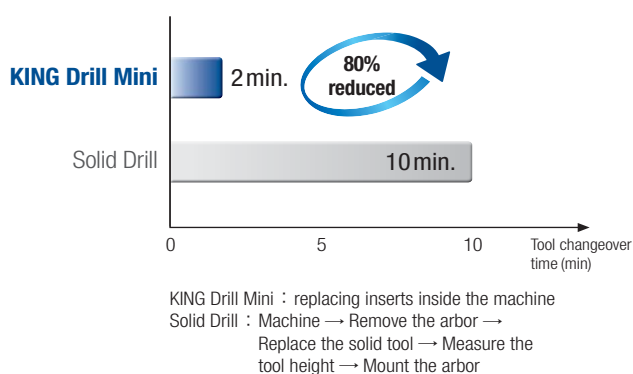

» 80% reduction in replacement time compared to solid drills

[Tool cost based on 480 meters of workpiece]

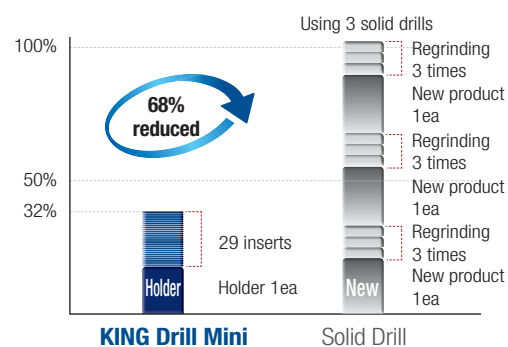

» The longer the machining length, the greater the tool cost savings effect


» With the surge in material costs, the maximized tool cost savings effect even more

Recommended Cutting conditions

ISO	Workpiece				Non-cutting resistance (N/mm ²)	Brinell hardness (HB)	Grade	vc (m/min)	Depth of cut = 2D,3D
	Workpiece materials		KS	ISO					fn (mm/rev)
P	Carbon steel	C=0.10 ~ 0.25%	SM15C SM25C	C15 C25	1500	80-120	PC5335	190 (130-230)	0.05-0.09
		C=0.20 ~ 0.55%	SM35C SM45C	C35 C45	1700	180-280	PC5335	150 (80-180)	0.05-0.09
	Low alloy steel ≤ 5%	Non-hardening treatment	SCM440	42CrMo4	1700	140-260	PC5300	150 (80-180)	0.05-0.09
		Hardening and tempering treatment	SCM445	-	2050	200-400	PC5300	100 (50~150)	0.05-0.09
	High alloy steel > 5%	Annealing treatment	STD11	-	1950	260-320	PC5300	100 (50~150)	0.04-0.08
		Hardened tool steel	STD61	X40CrMoV5-1	3000	300-450	PC5300	70 (30~120)	0.04-0.08
M	Austenitic		STS304 STS316	304 316	2000	135-275	PC5335	120 (60-150)	0.04-0.08
K	Grey cast iron		GC250 GC350	250 350	900	150-230	PC5300	190 (130-230)	0.04-0.1
	Ductile cast iron		GCD400 GCD500 GCD600	400-15 500-7 600-3	1100	150-230	PC5300	130 (100-180)	0.04-0.08

※ The above cutting conditions are based on ideal situations, so please adjust them according to your machining environment before use.

Precautions for insert fastening



- ① As shown in Figure 1, use an air gun to remove dust from the insert contact surfaces of the holder (both internal and external edges).
- ② Place the insert into the holder, press the contact surfaces tightly as shown in Figure 2, and then fasten the screw.
- ③ When fastening, make sure the insert is fully seated against the holder's bottom contact surface. Using a wrench, gently press the top of the insert avoiding the cutting edge while tightening.
- ④ After fully tightening the screw, perform a comprehensive final visual inspection to check for any lifting or proper seating of the insert.



* If the insert and tip seat are not fully seated during fastening, the insert may loosen, which can lead to a drop in performance.

- ※ Please replace the screw when it shows signs of wear.
- ※ Use the included wrench to fasten the screw securely.

Performance evaluation


Hole tolerance

Workpiece	SCM440, 200(L) × 300(W) × 300(H), Square bar	
Cutting condition	vc(m/min) = 180, fn(mm/rev) = 0.08, ap(mm) = 30, Wet	
Tool	Insert LOMT030104-LD(PC5300)	Holder K3D10020-03

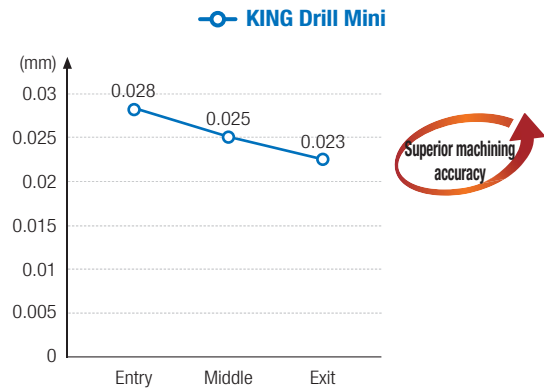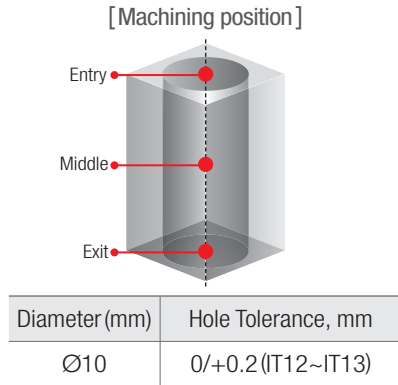


Excellent surface finish

Workpiece	200(L) × 300(W) × 300(H), Square bar	
Cutting condition	vc(m/min) = 80~140, fn(mm/rev) = 0.06~0.1, ap(mm) = 30, Wet	
Tool	Insert LOMT030104-LD	Holder K3D09020-03

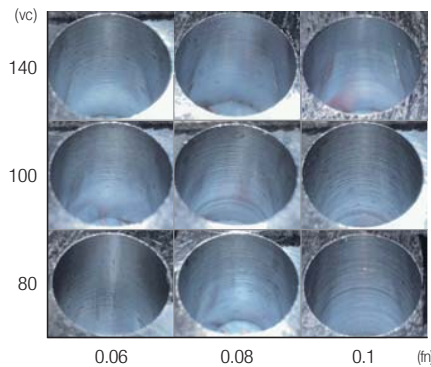


[SCM440(HB200)-PC5300]

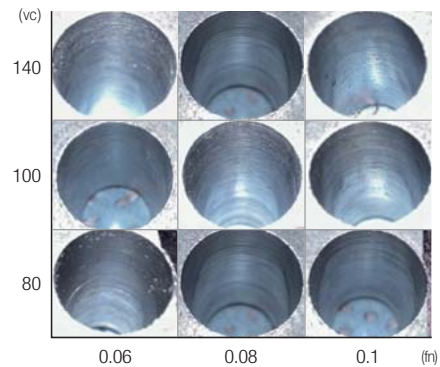


[SM45C(HB190)-PC5335]

Excellent chip control

Workpiece	200(L) × 300(W) × 300(H), Square bar	
Cutting condition	vc(m/min) = 60~140, fn(mm/rev) = 0.04~0.1, ap(mm) = 30, Wet	
Tool	Insert LOMT030104-LD	Holder K3D11520-03

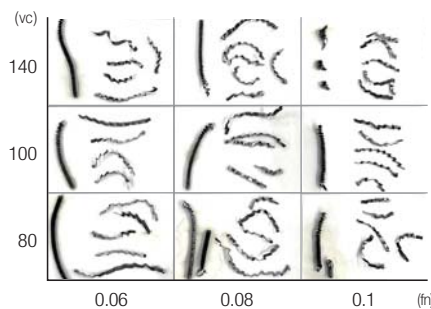

[SCM440(HB200)-PC5300]

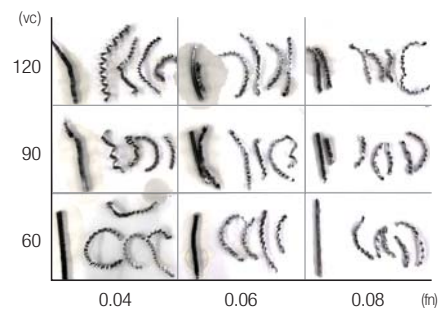


[STS304(HB200)-PC5335]

» Consistent chip formation

KING Drill Mini – Tap For pre-drilling holes for tapping


- The KING Drill Mini is designed for pre-tapping hole machining. It supports tap specifications divided into Metric and Inch types, and can be used for both through holes and blind holes.

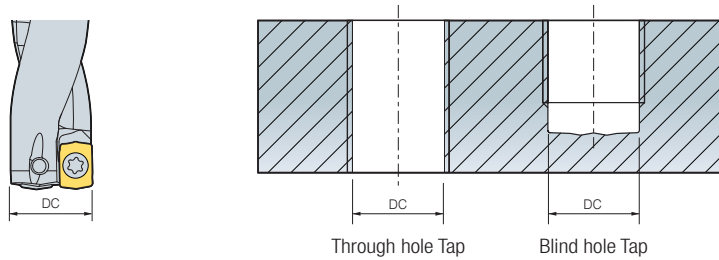

(mm)

Type	Tap	DC	Designation
Metric	M10 x 1	9	K3D09020-03
	M10 x 0.75	9.3	K3D09320-03
	M11 x 1.5	9.5	K3D09520-03
	M11 x 1	10	K3D10020-03
	M12 x 1.75	10.3	K3D10320-03
	M12 x 1.5	10.5	K3D10520-03
	M12 x 1.25	10.8	K3D10820-03
	M12 x 1	11	K3D11020-03
	M13 x 1.5	11.5	K3D11520-03
Inch	7/16-14 UNC	9.3	K3D09320-03
	1/2-13 UNC	10.8	K3D10820-03
	1/2-20 UNF	11.5	K3D11520-03






Drill and hole tolerance

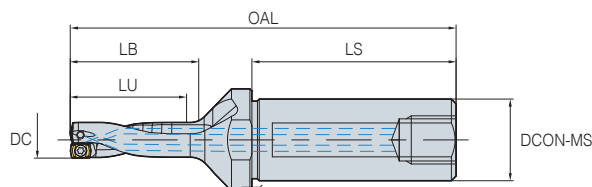

(mm)


Type		KING Drill Mini	KING Drill
2D, 3D	Diameter	Ø9 ~ Ø11.5	Ø12 ~ Ø29
	Drill tolerance	-0.03 ~ 0.07	-0.15 ~ 0
	Hole Tolerance	-0.1 ~ 0.2	-0.1 ~ 0.2

Special drill order form

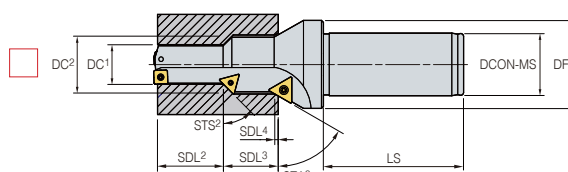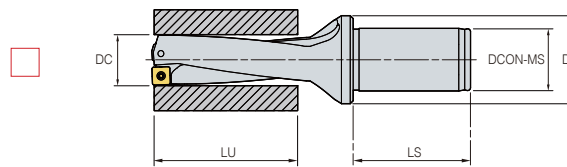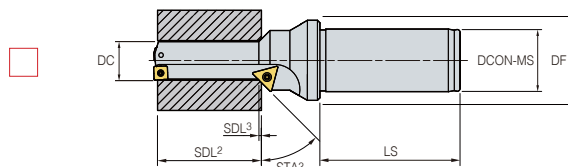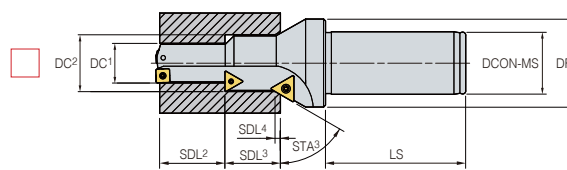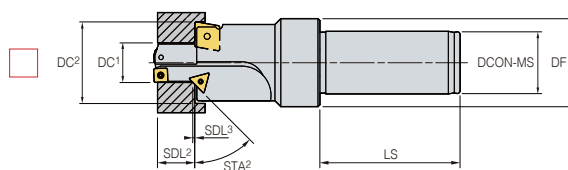

■ Coolant type


- ☐ Internal Coolant Plug Type ☐ Internal Coolant Type without Plug ☐ External Coolant Type







■ Tooling type

- ☐ Blind hole ☐ Through hole

■ Shank type

- ☐  Flat Type
- ☐  Weldon Type
- ☐  Whistle Notch Type


■ Side lock position

- ☐ Parallel to the external edge (standard type) 
- ☐ 90 degrees to the external edge (standard type) 
- ☐ Standard type with 180° direction relative to the external edge 
- ☐ 270 degrees to the external edge (standard type) 

■ Special Notes


- Current tool in use :
- Current operating/machining conditions :
 - RPM or cutting speed, vc in m/min :
 - Feed rate per minute mm/min or feed per revolution mm/rev :
 - Depth of cut :
- Criteria for tool life judgment :
- Equipment in use
 - Machining center :
 - General-purpose lathe :
 - CNC lathe :



Picture	Designation	Coated		Dimension (mm)				Geometry
		PC5335	PC5300	IC	RE	S	D ₁	
	LOMT030104-LD	●	●	3.5	0.4	1.5	5	

●: Stock item

KING Drill Mini (2D, 3D)

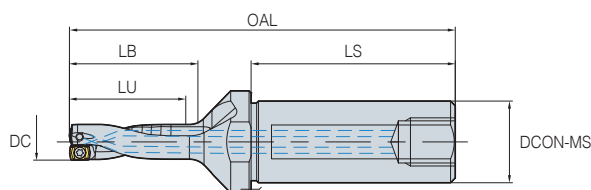

(mm)

Designation	Stock	DC	DCON-MS	LU	LB	LS	OAL	Available inserts	Screw	Wrench	Tightening torque
K2D 09020-03		9	20	18	24	50	87	LOMT030104-LD	FTKA01835	TW06P	0.4 [N·m]
09320-03		9.3	20	18	24	50	87				
09520-03		9.5	20	18	24	50	87				
10020-03		10	20	20	26	50	89				
10320-03		10.3	20	20	26	50	89				
10520-03		10.5	20	21	27	50	90				
10820-03		10.8	20	21	27	50	90				
11020-03		11	20	22	29	50	92				
11520-03		11.5	20	22	29	50	92				
K3D 09020-03	●	9	20	27	33	50	96				
09320-03	●	9.3	20	27	33	50	96				
09520-03	●	9.5	20	27	33	50	96				
10020-03	●	10	20	30	36	50	99				
10320-03	●	10.3	20	30	36	50	99				
10520-03	●	10.5	20	31	38	50	101				
10820-03	●	10.8	20	31	38	50	101				
11020-03	●	11	20	33	41	50	104				
11520-03	●	11.5	20	33	41	50	104				

●: Stock item


For the safe metalcutting

- Use safety supplies such as protective gloves to prevent possible injury while touching the edge of tools.
- Use safety glasses or safety cover to hedge possible dangers. Inappropriate usage or excessive cutting condition may lead tool's breakage or even the fragment's scattering.
- Clamp the workpiece tightly enough to prevent its movement while its machining.
- Properly manage the tool change phase because the inordinately used tool can be easily broken under the excessive cutting load or severe wear, and it may threat the operator's safety.
- Use safety cover because chips evacuated during cutting are hot and sharp and may cause burns and cuts. To remove chips safely, stop machining, put on protective gloves, and use a hook or other tools.
- Prepare for fire prevention measures as the use of the non-water soluble cutting oil may cause fire.
- Use safety cover and other safety supplies because the spare parts or the tools can be pulled out due to centrifugal force while high speed machining.



Head Office: Holystar B/D, 326, Seocho-daero, Seocho-gu, Seoul, 06633, Republic of Korea

Tel: +82-2-522-3181 Fax: +82-2-522-3184, +82-2-3474-4744 Web: www.korloy.com E-mail: sales.khq@korloy.com

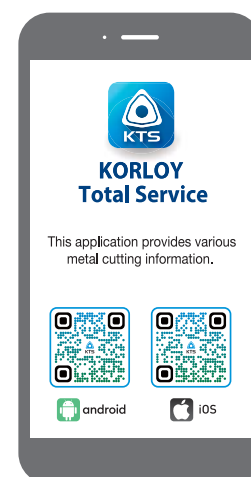

KORLOY AMERICA

620 Maple Avenue, Torrance, CA 90503, USA

Tel : +1-310-782-3800 / +1-888-711-0001 Fax : +1-310-782-3885

E-mail : sales.kai@korloy.com

KORLOY INDIA

Plot No. 415, Sector 8, IMT Manesar, Gurgaon 122051, Haryana, India

Tel : +91-124-4391790 Fax : +91-124-4050032

E-mail : sales.kip@korloy.com

KORLOY TURKIYE

Ziya Gokalp, Mah. Seyit Onbasi Cad. No:36, 3 Kat,

iC Kapi No : 5 Basaksehir/Istanbul, Turkiye

Tel : +90-212-813-8874 E-mail : sales.ktl@korloy.com

KORLOY RUSSIA

115280, Moscow, vn.ter.g. municipal district Danilovsky, street Masterkova, house 4, premises 1/2

Tel : +7-495-280-1458 Fax : +7-495-280-1459 E-mail : sales.krc@korloy.com

KORLOY UK

13 Approach Rd, Raynes Park, London SW20 8BA, United Kingdom

E-mail : sales.kul@korloy.com

KORLOY FACTORY INDIA

Plot NO. 415, Sector 8, IMT Manesar, Gurgaon 122051, Haryana, India

Tel : +91-124-4391790 Fax : +91-124-4050032

E-mail : pro.kim@korloy.com

KORLOY EUROPE

Gablonzer Str. 25-27, 61440 Oberursel, Germany

Tel : +49-6171-27783-0 Fax : +49-6171-27783-59

E-mail : sales.keg@korloy.com

KORLOY BRASIL

Av. Aruana 280, conj.12, WLC, Alphaville, Barueri, CEP06460-010, SP, Brasil

Tel : +55-11-4193-3810 Fax : +55-11-4193-5837

E-mail : sales.kbl@korloy.com

KORLOY CHILE

Av. Providencia 1650, Office 1009, 7500027

Providencia-Santiago, Chile

Tel : +56-229-295-490 E-mail : sales.kcs@korloy.com

KORLOY MEXICO

Avenida de las Ciencias, No. 3015, Interior 406, Juriquilla Santa Fe, C.P.76230 Querétaro, Mexico

Tel : +52-442-193-3600 E-mail : sales.kml@korloy.com

KORLOY CENTRAL EUROPE

Unit B03005, Repuloteri ut 2a, Budapest, 1112, Hungary

E-mail : sales.kce@korloy.com

